



# Slate Headlaps

Headlaps for Various Pitches	Normal Exposure Driving Rain Index <7m <sup>2</sup> /s	Severe Exposure Driving Rain Index >7m <sup>2</sup> /s
------------------------------	---	---

## Slate Size


mm	inches
610/355	24/14
610/305	24/12
560/305	22/12
560/280	22/11
510/305	20/12
510/255	20/10
460/305	18/12
460/255	18/10
460/230	18/9
405/305	16/12
405/255	16/10
405/230	16/9
405/205	16/8
355/255	14/10
355/205	14/8
355/180	14/7

## Minimum Roof Pitch (°)

20	22.5	25	30	35	40	45
115	105	90	75	75	65	65
130	115	90	75	75	65	65
115	105	90	75	75	65	65
120	110	90	75	75	65	65
115	105	90	75	75	65	65
125	110	90	75	75	65	65
115	105	90	75	75	65	65
125	110	90	75	75	65	65
125	115	100	75	75	65	65
*	*	*	75	75	65	65
*	*	*	75	75	65	65
*	*	*	75	75	65	65
*	*	*	75	75	65	65
*	*	*	75	75	65	65
*	*	*	75	75	65	65
*	*	*	75	75	65	65
*	*	*	75	75	65	65

## Minimum Roof Pitch (°)

22.5	25	30	35	40	45
125	105	90	75	75	65
120	120	110	90	80	70
120	105	90	75	75	65
130	110	100	85	75	65
125	100	85	75	75	65
135	115	100	90	75	65
*	110	85	75	75	65
*	115	100	85	75	65
*	*	105	95	85	65
*	*	90	80	75	65
*	*	100	95	75	65
*	*	100	100	85	65
*	*	105	100	90	65
*	*	80	75	75	65
*	*	90	85	75	65
*	*	95	90	80	65

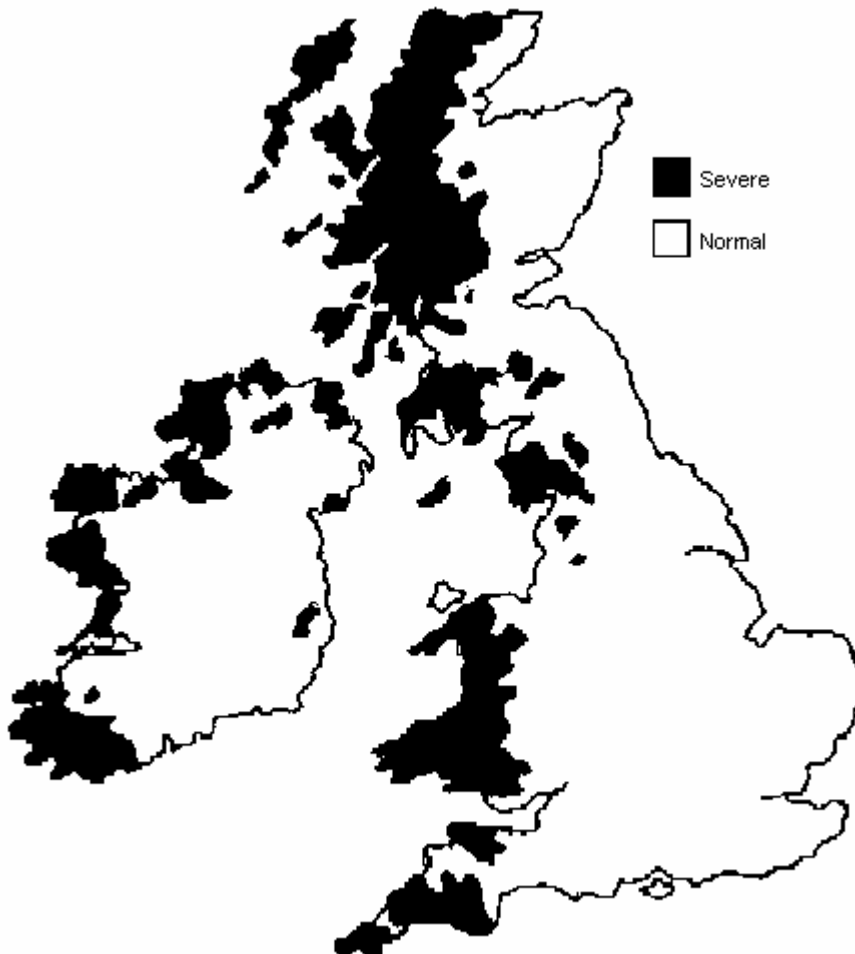

Map based on BRE Digest 127 - Crown copyright reserved.